



### Aluminium AluK BSC94 Slider Form

Direct Trade (Yorkshire) Ltd Unit 3 Sandall Carr Industrial Estate, Sandall Carr Road, Kirk Sandall, Doncaster, DN3 1QL.

Tel: 01302 880066 Fax: 01302 887070 Email: quotes@directtradeltd.co.uk / orders@directtradeltd.co.uk


Date of Order: \_\_\_\_\_ Quote  Order

Reference _____	Date Required _____
Company Name _____	Delivery Address _____
Address _____	_____
_____	_____
Postcode _____	Postcode _____
Telephone _____ Fax _____	Email _____
Sign: _____	Print: _____

Inline Sliding  Lift & Slide  Please note lead time on Lift & Slide door sets is on application

Overall Width (mm) \_\_\_\_\_ Overall Height (mm) \_\_\_\_\_  
Including Cills & Add Ons

Duo-Rail <input type="checkbox"/>
Tri-Rail <input type="checkbox"/>
Please Indicate: Slider 'X' Fixed 'O' Direction '<-/>'

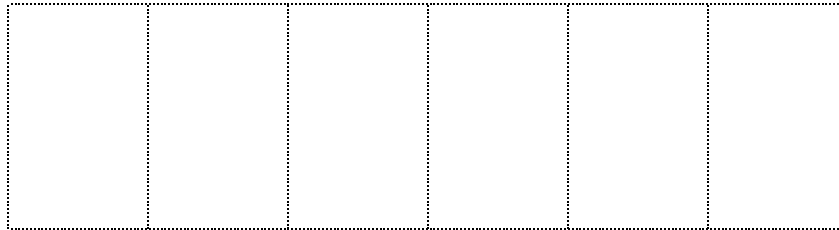

*All viewed from the outside - Please indicate Master Door if Applicable*

**Standard Single Colour Options:**

RAL 9005 Black Matt  RAL 7016 Anthracite Grey Matt  RAL 9910 White High Gloss

**Standard Dual Colour:**

RAL 7016 Anthracite Grey Matt Externally / RAL 9910 White High Gloss Internally

RAL Internally: \_\_\_\_\_ / Colour: \_\_\_\_\_ High Gloss  Semi Gloss  Matt

RAL Externally: \_\_\_\_\_ / Colour: \_\_\_\_\_ High Gloss  Semi Gloss  Matt

Marine Guarantee Required Please Tick  \*For Marine Environment applications, please refer to disclaimer at foot of page.

**Any of the above will incur an additional set-up cost and extended lead time**

**Cill:** No Cill  177mm  Cill Horns: \_\_\_\_\_ mm (No Horns as Standard)

**No Cill available on a Tri-rail / All Items will be Face Drained**

**Trickle Vent:** Qty \_\_\_\_\_ (4000m<sup>2</sup> through 22mm Patio Extension to the head)

**Door Handle:** White  Black  Silver

**28mm Glazed:** Yes  No  (Standard 28mm glazing comprising of 4mm Tough K Softcoat + ARGON + 4mm Tough Optiwhite Swiss Black Spacer Bar)

**Additional Requirements:**

Please Note: We cannot guarantee any product installed within 50 metres of the coast, source of pollution or 2 metres from a swimming pool against deterioration of profile or hardware. Any product fitted within 5000 metres of a hostile environment a recommended cleaning regime must be adhered to and recorded (please consult product guide)

All frames are non-load bearing.  
Sliding pane to the inside.  
Door stop black as standard.

Size Limitations: each panel being no larger than 2000mm wide with a maximum height of up to 3000mm, subject to wind load deflection. Maximum 200kgs per sash.