



Direct Trade (Yorkshire) Ltd Unit 3 Sandall Carr Industrial Estate, Sandall Carr Road, Kirk Sandall, Doncaster, DN3 1QL.
Tel: 01302 880066 Fax: 01302 887070 Email: aluminium@directtradeltd.co.uk

AluK BSF70 HI Bifold Doors

Quote Order Date _____

Job Reference / Number _____ Collection Delivery Date Required: _____

Company Name _____ Delivery Address: _____

Address _____

Postcode _____

Postcode _____ Telephone: _____ Fax: _____

Sign: _____ Print: _____ Order Taken by: _____

*Unsigned Orders cannot be processed

Overall Width (mm) _____ Overall Height (mm) _____ Open in Open Out

**Including any Cills or Frame Extenders all viewed from the Outside*

Size Limitations: Each panel must be no larger than 1200mm wide & 100kg in weight, no smaller than 550mm with a Maximum height of up to 3000mm, subject to wind load deflection (No calculations made unless specified)

54 mm Fully Rebated Threshold 34mm Non-Weather Rated Threshold 22mm Room Divider

Configuration: Number of Doors Number of Doors If Master Door is Req'd please
Total Number of Sashes Folding / Sliding to the Left Folding / Sliding to the Right Indicate L / R

 L

 R

Standard Single Colour Options:

RAL 9005 Black Matt

RAL 7016 Anthracite Grey Matt

RAL 9910 White High Gloss

Standard Dual Colour Options:

RAL 7016 Anthracite Grey Matt / RAL 9910 White High Gloss

*RAL Inside: _____ / Colour: _____ High Gloss Semi-Gloss Matt

*RAL Outside _____ / Colour: _____ High Gloss Semi-Gloss Matt

Marine Guarantee Required Please Tick *For Marine environment applications please refer to disclaimer at the foot of page

The above will incur an additional colour set-up cost and extended lead times

Traffic Door Handle Black White Satin Silver Chrome

Non-Locking T Handle Black White Satin Silver Chrome

Locking T Handle *(only on configurations without a traffic door) Black White Satin Silver Chrome

Hinges and Associated Hardware to be Black Finish as Standard

Drainage: Concealed Face None Cill: 95mm 150mm 177mm 190mm No Cill

Overall Cill Size _____ mm (Cut To Size As Standard)

24mm Square Bead - Glazed Yes No (4/16/4 Clr Optitherm S1 + Tough / Optifloat Tough Black Warmedge Spacer)

36mm Chamfered Bead - Glazed Yes No (4/12/4/12/4 Clr Tough/ Ecoplus Tough/ Ecoplus Tough Black Warmedge Spacer)

20mm Extender 40mm Extender Trickle Vent Qty _____ (4000m² trickle vents through 40mm to the head)


Left / Right / Top Left / Right / Top

Additional Requirements:


e.g. Pas 24/Document Q

Please note:


- We cannot guarantee any product installed within 50 metres of the coast, source of pollution or 2 metres from a swimming pool against deterioration of profile or hardware. Any product fitted within 5000 metres of a hostile environment a recommended cleaning regime must be adhered to and recorded (please consult product guide) - Additional costs may be incurred, please advise on the environment if appropriate.
- All frames are non-load bearing.



Rebated Threshold




Non Weather Rated Low Threshold



Non Thermally Broken Low Threshold

AW667 24mm Square Bead




AW514 36mm Chamfered Bead



For General Configurations Please (see below): Note: Types A, E, F, M & N will NOT have Lever / Lever or Master Door Slave Door to have Finger Bolts as Standard

Configuration options

All style numbers shown below can be manufactured to open in the opposite direction. For example, style 3-2-1 can be reverse handed to 3-1-2.

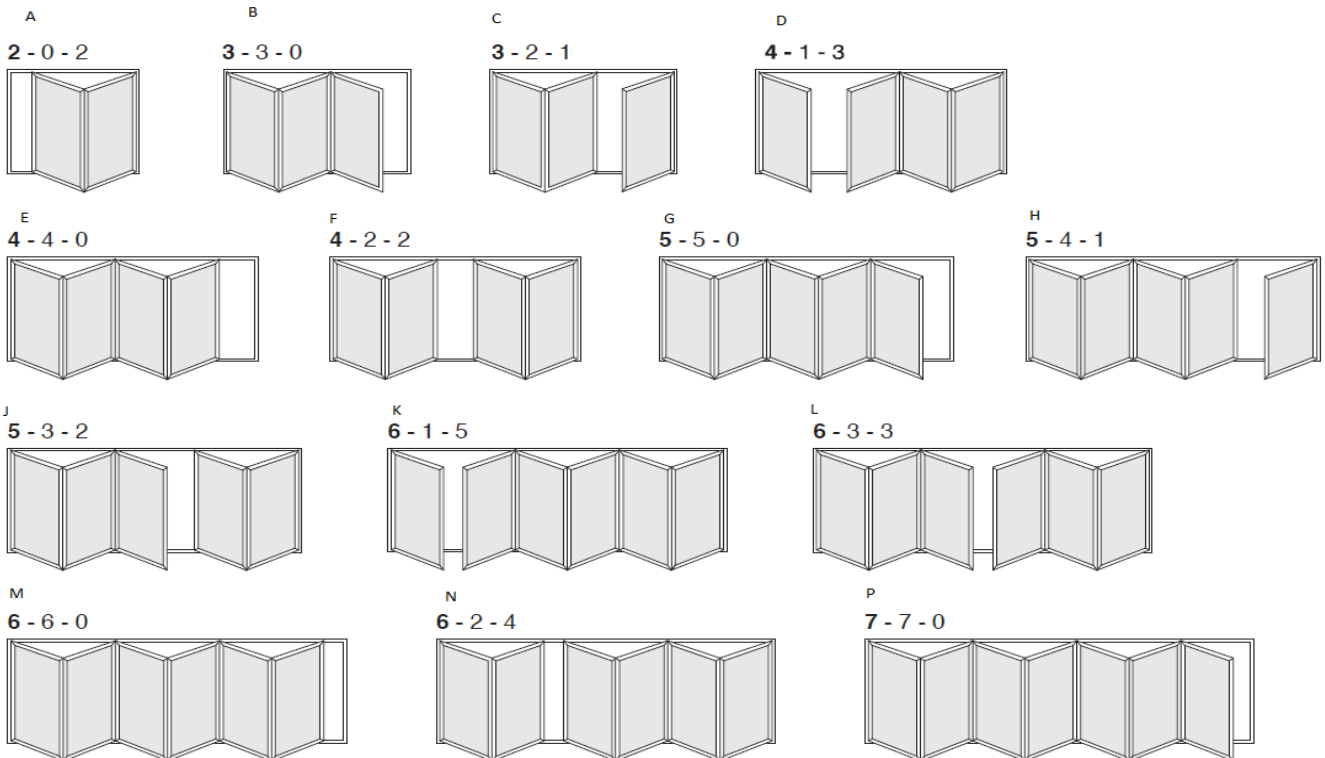

Please note:

- We cannot guarantee any product installed within 50 metres of the coast, source of pollution or 2 metres from a swimming pool against deterioration of profile or hardware. Any product fitted within 5000 metres of a hostile environment a recommended cleaning regime must be adhered to and recorded (please consult product guide) - Additional costs may be incurred, please advise on the environment if appropriate.
- All frames are non-load bearing.

