

# STELLAR Lift & Slide Door

Quote  Order  Date: \_\_\_\_\_

Job Reference/Number: \_\_\_\_\_

Collection:  Delivery:  Date required: \_\_\_\_\_

Company Name: \_\_\_\_\_

Delivery Address: \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_


Postcode: \_\_\_\_\_

Postcode: \_\_\_\_\_ Tel: \_\_\_\_\_ Fax: \_\_\_\_\_

Sign: \_\_\_\_\_ Print: \_\_\_\_\_ Order Taken By: \_\_\_\_\_

\*Unsigned orders can not be processed

Overall Width (mm) \_\_\_\_\_ Overall Height (mm) \_\_\_\_\_ Including Cills and Add Ons

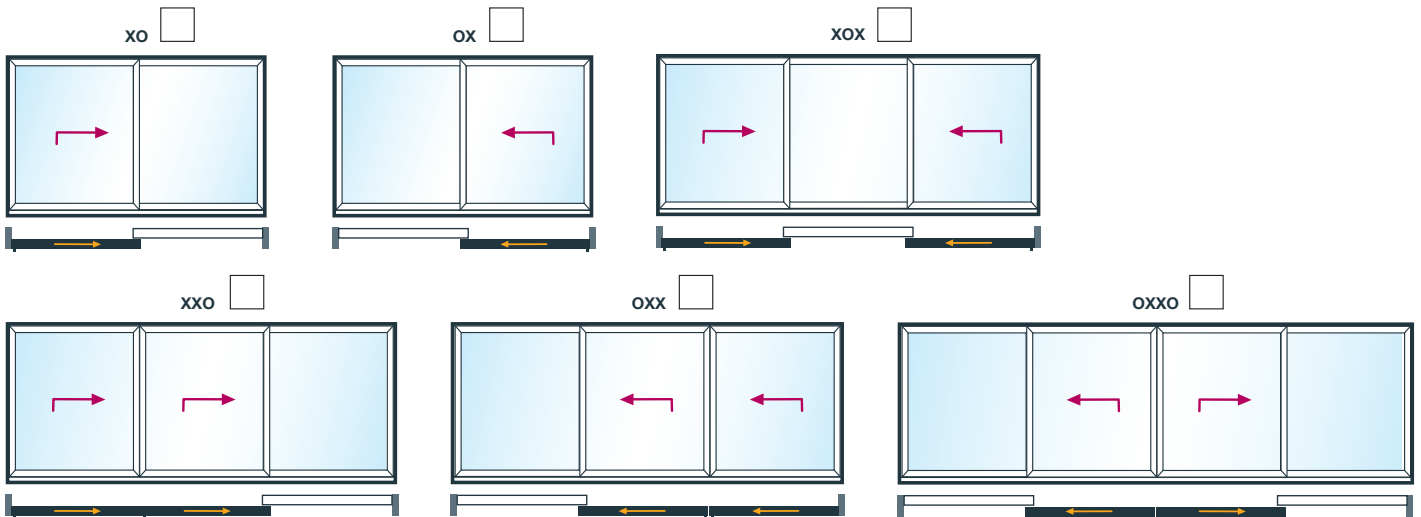

STANDARD SINGLE COLOUR OPTIONS: RAL 9005 Black Matt  RAL 7016 Anthracite Grey Matt   
RAL 9003 White Matt

STANDARD DUAL COLOUR OPTIONS: RAL 7016 Anthracite Grey Matt / RAL 9003 White Matt   
RAL 9005 Black Matt / RAL 9003 White Matt

\*RAL Inside: \_\_\_\_\_ / Colour: \_\_\_\_\_ \*RAL Outside: \_\_\_\_\_ / Colour: \_\_\_\_\_

Marine Guarantee Required Please Tick  \*For Marine environment applications please refer to disclaimer at the foot of page  
The above will incur an additional colour set-up cost and extended lead times

Cill: 205mm  255mm  No Cill  Please note: 255mm is a non-stock item, extended lead times will apply. Cill Horns: \_\_\_\_\_ mm (No Horns as Standard)

Drainage: Face  Concealed

Trickle Vent: Qty \_\_\_\_\_ (To 35mm Frame Extension) Door Handle: White  Black  Silver

Glazed: Yes  No  (Please select appropriate bead)

Options: 28mm  36mm  44mm  Standard 28mm Unit - 4/20/4 Clear Tough KS Optiwhite argon warmedge spacer black

Additional Requirements: \_\_\_\_\_

Please note: - We cannot guarantee any product installed within 50 metres of the coast, source of pollution or 2 metres from a swimming pool against deterioration of profile or hardware. Any product fitted within 5000 metres of a hostile environment a recommended cleaning regime must be adhered to and recorded (please consult product guide) Additional costs may be incurred, please advise on the environment if appropriate. All frames are non-load bearing. Door stop black as standard.

Size Limitations - Minimum sash Width 750mm / Maximum Sash Width 3350mm - Maximum Sash Height 2675mm. These are subject to wind load deflection. Maximum 300kgs per sash.

