



Direct Trade (Yorkshire) Ltd.  
Unit 3, Sandall Carr Industrial Estate, Sandall Carr Road, Kirk Sandall, Doncaster, DN3 1QL

Tel: 01302 880066

Email all enquiries to: aluminium@directtradeltd.co.uk

www.directtradeltd.co.uk

# STELLAR Slimline Bi-Fold Doors

Quote  Order  Date: \_\_\_\_\_

Job Reference/Number: \_\_\_\_\_

Collection:  Delivery:  Date required: \_\_\_\_\_

Company Name: \_\_\_\_\_

Delivery Address: \_\_\_\_\_

Address: \_\_\_\_\_

Postcode: \_\_\_\_\_

Postcode: \_\_\_\_\_ Tel: \_\_\_\_\_ Fax: \_\_\_\_\_

Sign: \_\_\_\_\_ Print: \_\_\_\_\_ Order Taken By: \_\_\_\_\_

\*Unsigned orders can not be processed

Overall Width (mm) \_\_\_\_\_ Overall Height (mm) \_\_\_\_\_ Opening Option  In  Out

\*Including any Cills or Frame Extenders all viewed from outside

Size Limitations. Each panel must be no larger than 1200mm wide, no smaller than 650mm wide with a maximum height of up to 2500mm, subject to wind load deflection (No calculations made unless specified)

55 mm Fully Rebated Threshold  33.5mm Non-Weather rated Low Threshold  55mm Rebated Threshold W/ Integral Cill - Open Out Only

CONFIGURATION:	Number of Doors	Number of Doors	If Master Door is Req'd please indicate L / R	
Total Number of Sashes	Folding / Sliding to the Left	Folding / Sliding to the Right	L	R
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

STANDARD SINGLE COLOUR OPTIONS: RAL 9005 Black Matt  RAL 7016 Anthracite Grey Matt   
RAL 9003 White Matt

STANDARD DUAL COLOUR OPTIONS: RAL 7016 Anthracite Grey Matt / RAL 9003 White Matt   
RAL 9005 Black Matt / RAL 9003 White Matt

\*RAL Inside: \_\_\_\_\_ / Colour: \_\_\_\_\_ \*RAL Outside: \_\_\_\_\_ / Colour: \_\_\_\_\_

Marine Guarantee Required Please Tick  \*For Marine environment applications please refer to disclaimer at the foot of page  
The above will incur an additional colour set-up cost and extended lead times

Traffic Door Handle Black  White  Satin Silver  Chrome

Shootbolt Handle - Locking Black  White  Grey  Chrome

Hinges and Associated Hardware to be Black Finish as Standard

Drainage: Concealed  Face  None  Cill: 100mm  150mm  200mm  No Cill

Overall Cill size \_\_\_\_\_ mm (cut to size as standard)



Glazed: Yes  No  (Please select appropriate bead)


Options: 28mm  36mm  44mm

Standard 28mm Unit - 4/20/4 Clear Tough KS Optiwhite argon warmedge spacer black


18mm Extender  36mm Extender  Trickle Vent  Qty \_\_\_\_\_ (trickle vents through 36mm to the head)  
Left/ Right/ Top Left/ Right/ Top

Additional Requirements: eg. Pas 24/Document Q \_\_\_\_\_


Please note: - We cannot guarantee any product installed within 50 metres of the coast, source of pollution or 2 metres from a swimming pool against deterioration of profile or hardware. Any product fitted within 5000 metres of a hostile environment a recommended deaning regime must be adhered. to and. recorded (please consult product guide) Additional costs may be incurred, please advise on the environment if appropriate. All frames are non-load bearing.

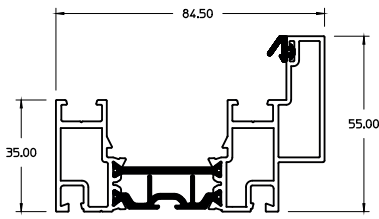

55mm Rebated Threshold



33.5mm Non-Weather rated Low Threshold

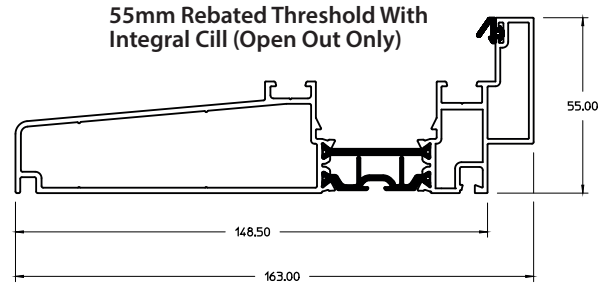

55mm Rebated Threshold With Integral Cill (Open Out Only)


**EVERY STELLAR SLIMLINE BIFOLD DOOR IS A BESPOKE PRODUCT.**

From the configuration of the door panels to the colour of the frames and handles, every element is tailored to your precise specifications to fit perfectly with any home. You can find out more about your options over the following pages. There are multiple options available in single traffic door, French door or left and right stacking.

**DIMENSIONS AND CONFIGURATIONS**

⊕ Open in or open out options ⊕ Sash width to 1200mm ⊕ Maximum height: 2500mm


**OPEN OUT**

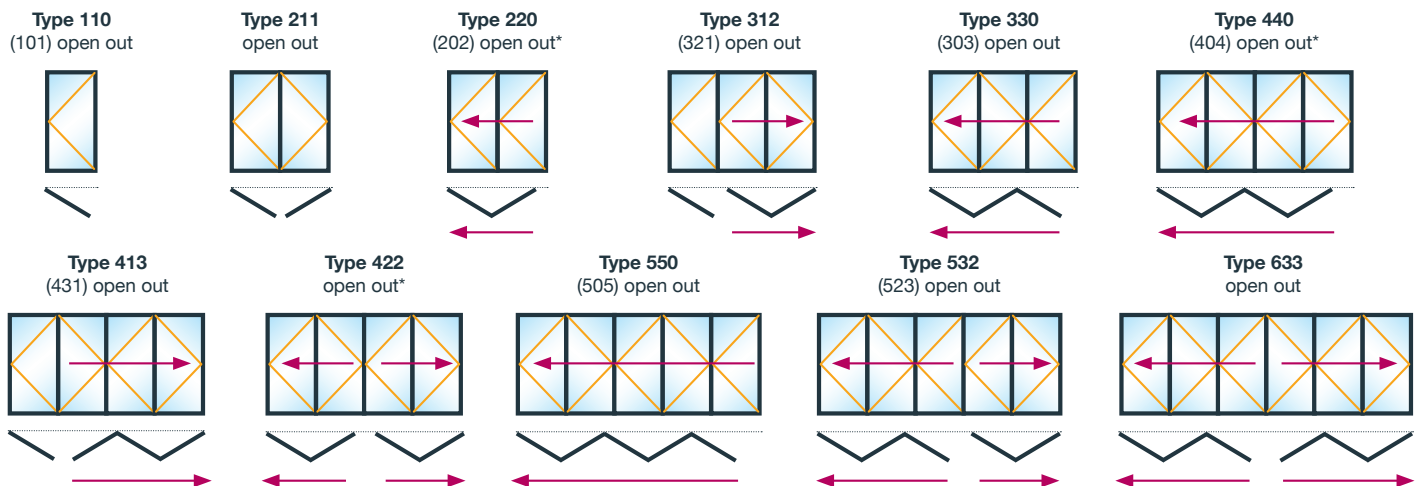

The most common configurations are shown above, but other styles featuring up to seven panes are also possible (please refer to the technical manual).

\*No external access or traffic door with this design.

**OPEN IN**

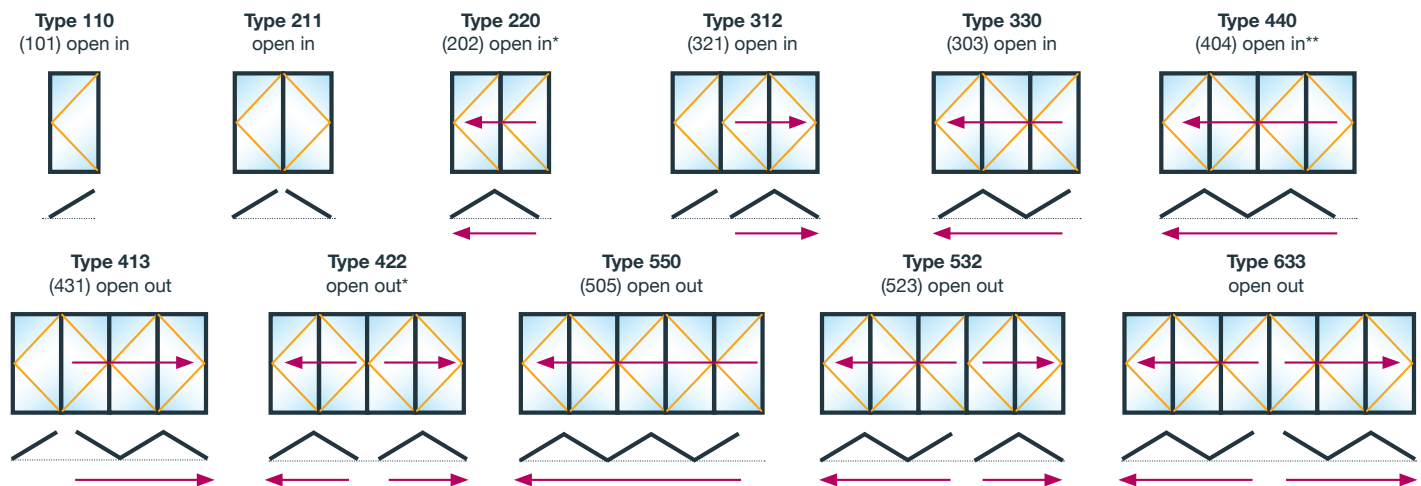

The most common configurations are shown above, but other styles featuring up to seven panes are also possible (please refer to the technical manual).

\*No external access or traffic door with this design.