

Quote/Order Form

☐ ORDER orders@directtradeltd.co.uk

☐ QUOTE quotes@directtradeltd.co.uk



Glassroof

By Ultraframe

ACCOUNT No

Company Name

Order Number

JOB REFERENCE

Installer Company Name

Company Contact

Telephone No

Email

Delivery Address

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

*Required for structural snow / wind loading

*Site Postcode

Roof Pitch (°)

Roof height restriction

Frame width

PLAN VIEW

FRONT ELEVATION

How to place an order for a Glass Roof

1. Fill in above information and sketch plan and elevations showing position and dimensions of walls, brick piers, windows, doors, cut outs and intrusions. If necessary, attach photos of existing property.

2. Advise of the preferred position of any roof vents, rainwater pipes (RWP), tie bars and any additional information that may assist in specifying your order. If a Goalpost is needed, please complete page 3 of this order form.

3. A confirmation drawing will be created using our bespoke software and sent to you via email for you to check and sign. This will start the manufacture process. A delivery date will be emailed back as soon as it is scheduled.

In order to pass building regulations, all conservatory over 2.5m wide will need a glass U-value of at least 1.2. Smaller conservatories will need glass to be specified with 1.0 U-value. The thermal design guide within UDesign will provide the specific U-Value of each glass roof.

LEFT ELEVATION

RIGHT ELEVATION

Order form



Glassroof

By Ultraframe

JOB REFERENCE

ROOF COLOUR	White	Deeplas	Grained Grey	Smooth Grey	Mahogany	Light Oak	Rosewood	Black	Bespoke RAL/BS Colour
External	☐	☐	☐	☐	☐	☐	☐	☐	
Internal	☐	☐	☐	☐	☐	☐	☐	☐	

INTERNAL PELMET (when internal pelmet specified)

☐ 300mm ☐ Other (300-1200mm)

Please State (mm):

☐ On Fascia ☐ Below Fascia

If fitting to a bungalow please indicate Soffit Depth

CORNICE

Style ☐ 1 Tier ☐ 2 Tier ☐ 3 Tier ☐ Curved

Colour ☐ White ☐ Matt Grey ☐ Deeplas ☐ RAL/BS Colour

DOWNPIPE

☐ Round
☐ Square

CONSERVAFLASH

☐ Yes
☐ Eaves flow (eaves beam trickle ventilation)

RIDGE

☐ Classic Ridge
☐ Slimline Ridge (ONLY on 25° georgian roof)

TOP CAPPINGS

☐ Dome (PVCu) ☐ Aluminium
☐ Bevel (PVCu) ☐ Square Aluminium
(Mono pitch lean-tos only in grey or white)

BOX GUTTER OPTIONS:

☐ 165mm ☐ 165mm Chambered
☐ 265mm ☐ Reinforced Box Gutter
☐ Other, please state:

GLASS OPTIONS - WARM EDGE SPACER

Super Energy Saving Glass

Low Solar Gain	Medium Solar Gain	High Solar Gain
☐ Ultimate Blue	☐ Bronze 4S	☐ Clear 4S
☐ Aqua 4S	☐ Blue 4S	
	☐ Neutral 4S	

Good Thermal Efficiency

Low Solar Gain	Medium Solar Gain	High Solar Gain
☐ Std Aqua	☐ Std Bronze	☐ Std Clear
	☐ Std Blue	
	☐ Std Neutral	

POLYCARBONATE

Size ☐ 25mm ☐ 35mm

Colour ☐ Clear ☐ Opal ☐ Bronze ☐ Bronze / Opal ☐ Heatguard / Opal

UNGLAZED

Polycarb ☐ 25mm ☐ 35mm

Glass ☐ 24mm

ROTABOND SEALANT - MS POLYMER

☐ Black Tubes (NCGS001B)

ROOF VENTS AND MECHANISM (mark plan)

☐ Roof vent up to ridge ☐ Roof vent with glass above

Brass ☐ Manual Spindle ☐ Manual Spindle and pole ☐ Manual Spindle and telescopic pole

Chrome ☐ Manual Spindle ☐ Manual Spindle and pole

☐ Electric motor with digital thermostat and rain sensor ☐ Electric motor and rocker switch

☐ Electric motor with radio and remote control ☐ Electric motor with thermostat (AVTD002)

☐ Electric without switch/thermostat (Motor only)

DECORATION

Cresting ☐ Renaissance ☐ Tudor ☐ Elizabethan ☐ Baroque ☐ Classic ☐ Low profile ☐ Aluminium

Finial ☐ Pikestaff ☐ Sceptre ☐ Ball ☐ Coronet ☐ Classic ☐ Low profile ☐ Aluminium

ANCILLARY EXTRAS

Please refer to the Classic Technical Guide.

Goalpost specification



Glassroof

By Ultraframe

Goalpost Colour

☐ To match roof internals


☐ Bespoke:- RAL colour Gloss Level %

Leg length

Frame height NB. It is advised not to order any windows or doors until goalpost specification has been finalised.

Length below floor/cill

Goalpost leg example

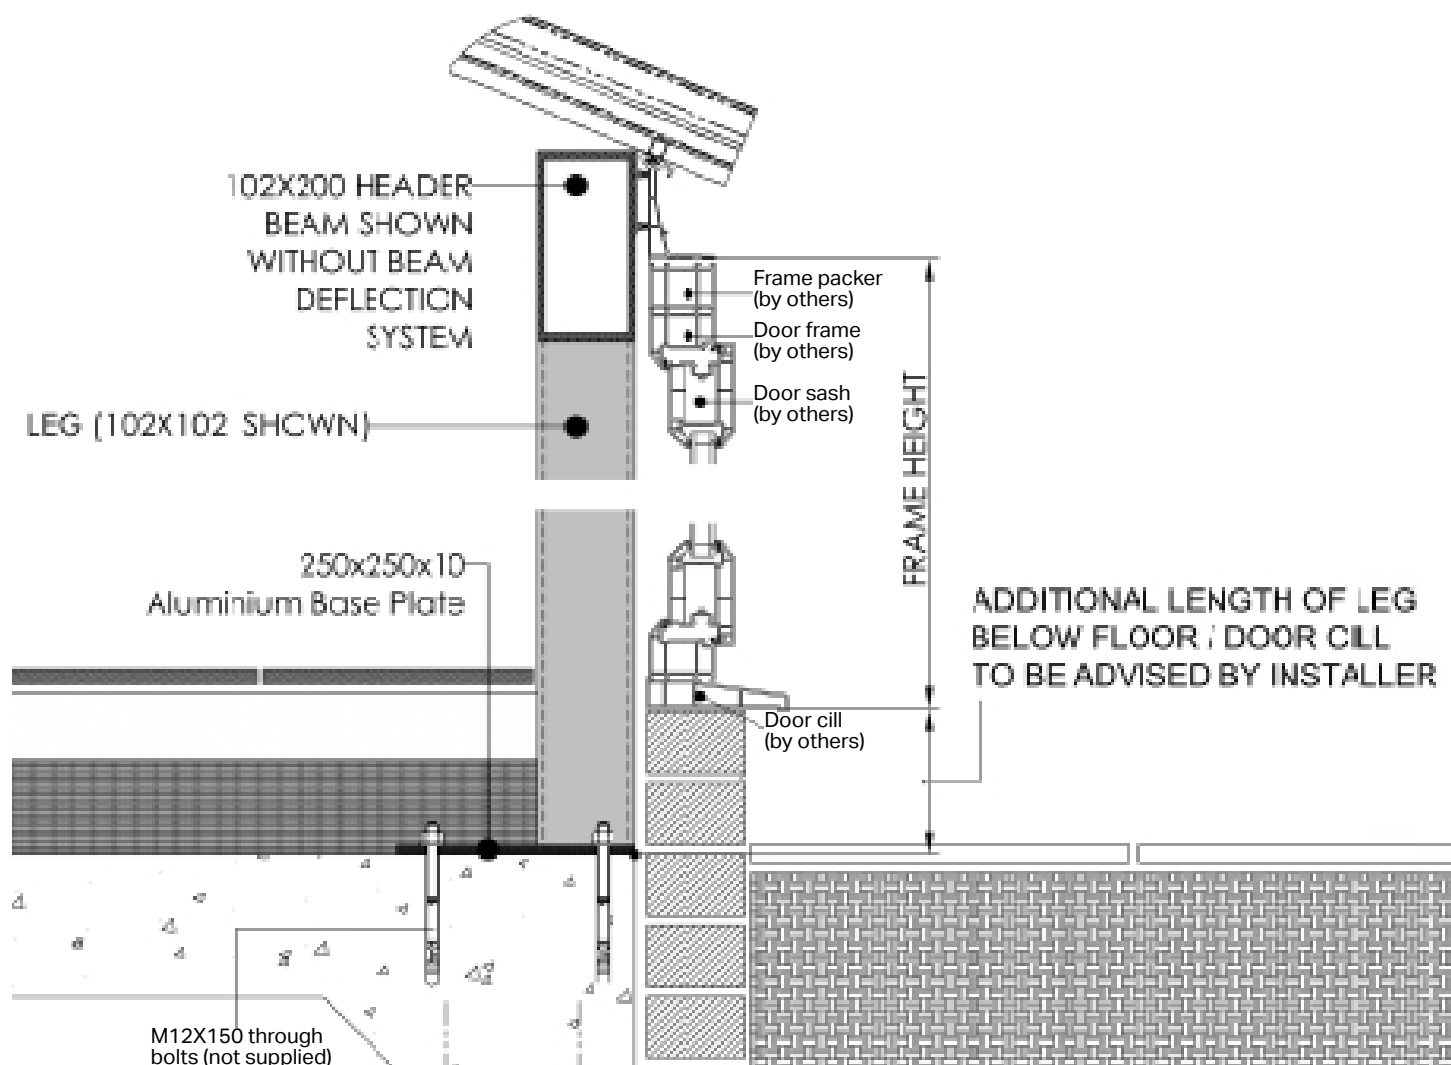

Disclaimer:

Ultraframe does not take responsibility for the structural stability of the entire structure, only the products provided by Ultraframe. To ensure the rest of the structure is suitable, it is the installers responsibility to ensure that all walls, foundations and building structure are compliant with Document A of Building Regulations. Any adjoining window frames must be a minimum of 70mm reinforced PVC frames, coupled in accordance with the manufacturer's recommendations. Host walls must be suitable to take the additional load and forces of the new building.

All beam end plates (WP and SP) must be bolted to a suitable substrate with adequate anchors. For the WP, the host wall suitability to accept the increased forces must be checked. The SP should be positioned on a suitable concrete padstone built into the supporting wall and strapped down to at least two additional courses.

Baseplates must be anchored using a minimum of 3no. M12 through bolts (minimum 6kN Tension/Uplift capacity per bolt). Foundations or floor slabs must be designed to accept the additional forces.

Order Form



1. Base

Are you using the hup! Base? ☐ Yes ☐ No

If yes, please answer the questions below:

What height is the base DPC to ground?

Which foundations will you be using? ☐ Pads ☐ Ground screws

If using ground screw, please indicate the name of your ground screw provider. ☐ GBGS ☐ Other supplier

Which skirt finish do you require? ☐ Plain ☐ Brick slips (brick type)

If you have a sloping skirt, please draw it on the diagram, giving a measurement every metre.

If you would like brick slips, please let us know the brick type and mortar colour.


Brick type ☐ Red Multi ☐ Smooth Anthracite ☐ Smooth Red ☐ Rustic Buff Multi

Mortar colour ☐ Grey ☐ Sand ☐ Red

Intrusions needed (please mark on the base plan below) ☐ Drain cover ☐ Obstruction ☐ Drain Pipes

Please draw the footprint of your building marking each elevation A, B, C, D etc. Tick the box to indicate which dimension you are using

☐ Existing base size ☐ Finished wall size ☐ hup! base size (to edge of hup! clips)



hup! on existing wall

Is hup! going on a existing wall? ☐ Yes ☐ No

What is the thickness of existing wall?mm

Do you want it on cill or full clad? ☐ Cill (use internal frame dimension) ☐ Full Clad (use external base dimension)

If on cill, please send over ONLY the internal frame dimension. If using full clad, please send over ONLY the external base dimensions.

This image shows a full page of blank graph paper. The grid consists of thin, light gray horizontal and vertical lines that intersect to form small squares across the entire surface. There are no margins, text, or other markings on the paper.

Extended Base Tray required?

Width of Cavity wall 300mm. See hup! Specification Guide for more details.

Please note hup! walls will protrude at least 45mm (25mm for battens, plus c15mm depending on claddings) outside of your base so that the wall finishes (claddings) will be ventilated. All critical dimensions will be confirmed before order stage.

Please return to quotes@directtradeLtd.co.uk or orders@directtradeLtd.co.uk

Order Form



2. Elevations

Please draw each elevation of your hup! walls marking the elevations clearly with A, B, C, D etc. Include window and doors sizes and distance from the eaves as well as the floor clearly.

Tick this box if you require the cable management panel which is supplied on all panels above 560mm. ☐

A large rectangular area filled with a light gray grid, intended for the customer to draw the elevations of their hup! walls, including window and door sizes and distances from the eaves and floor.

Order Form



3. Wall Finishes

The type of wall finish can change the sequence of the battens and calcium silicate board, please tick the wall finish for this project?

- ☐ Brick Slips ☐ Steel façade (Boundary only) ☐ Render ☐ External Cladding - Type

Brick Slips :

Ultraframe to supply: Yes ☐ Brick Shade: (See hupbrickslips.co.uk for details and prices).....

Mortar Colour: White ☐ Neutral Grey ☐ None ☐ Please note if supplying your own brick slips a lime based mortar must be used.

Window reveal detail : Aperture trim ☐ Reveal brick slips ☐ Reveal bricks and soldier course ☐

4. Walling kit

Please tick the box to confirm which elements of the walling kit you will require to be supplied by Ultraframe.

- ☐ None - I am supplying my own
 ☐ Ventilation trim only
☐ Aperture trim only
 ☐ Batten kit (includes battens and fixings)
☐ Render Board kit (includes ventilation trim, aperture trims and battens)
☐ Brick Slip Rails (includes trims, battens and render Board. Brick slips not supplied)

5. Aperture Trim Colour

- ☐ White ☐ Smooth Grey ☐ Light Oak ☐ Rosewood

Surveyor's Details

If you would like us to liaise with your surveyor on this hup! order, please put contact details below.

NAME: _____

CONTACT NO:

EMAIL ADDRESS:

